


NT-S5E2E

Single-Crystalline Silicon
Photovoltaic Module
with 185W Maximum Power

GENERAL DESCRIPTION

SHARP's NT-S5E2E photovoltaic module is designed for large electrical power requirements. Based on the technology of crystal silicon solar cells cultivated for over 35 years, this module has superb durability to withstand rigorous operating conditions and is suitable for grid connected systems.

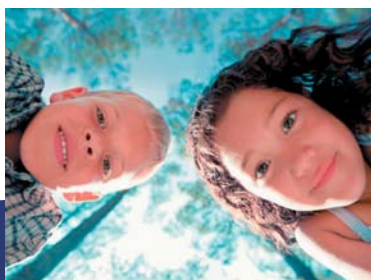

FEATURES

- 1 High-power module (185W) using 125mm square single - crystal silicon solar cells with 14.2% module conversion efficiency.
- 2 Photovoltaic module with bypass diode minimises the power drop caused by shade.
Textured cell surface to reduce the reflection of sunlight and BSF (Back Surface Field) structure to improve cell conversion efficiency: 17.1%.
- 3 Using white tempered glass, EVA resin, and a weatherproof film along with an aluminum frame for extended outdoor use.
- 4 DC 24V system and high-voltage output for grid-connected system
- 5 Output terminal: Lead wire with waterproof connector

FINDING ENERGY FOR THE FUTURE

SPECIFICATIONS

Cell	Single-crystalline silicon solar cells, 125mm square
No. of cells and connections	72 in series
Application	DC 24V system
Maximum system voltage	DC 600V
Series fuse rating	10A
Maximum power	175.8 W (Min.)
Dimensions	1575 (h) x 826 (w) x 46mm (d)
Weight	17.0Kg

ABSOLUTE MAXIMUM RATINGS

Parameters	Rating	Unit
Operating temperatures	-40 to +90	°C
Storage temperature	-40 to +90	°C
Dielectric voltage withstood	2200 max.	V-DC

OUTPUT TERMINAL


Type of output terminal	Lead wire with connector
-------------------------	--------------------------

ELECTRO-OPTICAL CHARACTERISTICS


Model		NT-S5E2E			
Parameters	Symbol	Min.	Typ.	Unit	Condition
Open circuit voltage	Voc	-	44.9	V	Irradiance: 1000 W/m ²
Maximum power voltage	Vpm	-	36.21	V	
Short circuit current	Isc	-	5.75	A	
Maximum power current	Ipm	-	5.11	A	Module temperature: 25°C
Maximum power	Pm	175.8	185.0	W	
Encapsulated solar cell efficiency	η_c	-	17.1	%	
Module efficiency	η_m	-	14.2	%	

CHARACTERISTICS


Current, Power vs. Voltage Characteristics
(Cell temperature: 25°C)

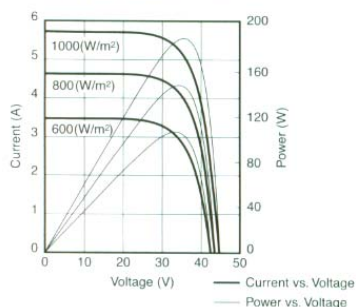


Open Circuit Voltage, Short Circuit Current vs. Irradiance Characteristics
(Cell temperature: 25°C)

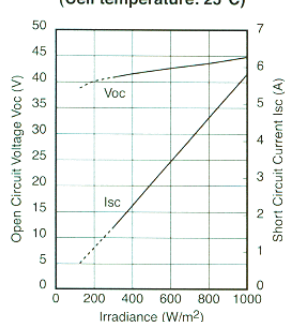

Normalized Isc, Voc, Pm vs. Cell Temperature Characteristics

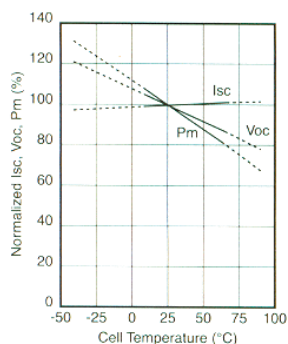

OUTLINE DIMENSIONS

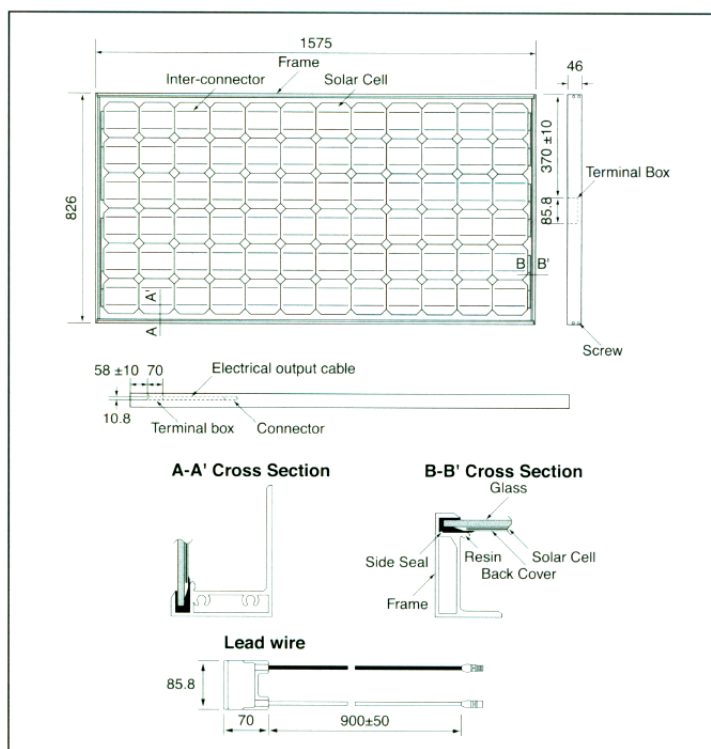

In the absence of confirmation by specification sheets, SHARP takes no responsibility for any defects that may occur in equipment using any SHARP products shown in catalogues, data books, etc. Contact SHARP in order to obtain the latest specification sheets before using any SHARP products.

- Specifications are subject to change without notice.

APPLICATIONS

- Grid connected residential systems
- Office buildings
- Solar power stations
- Solar villages
- Villas, mountain cottages
- Pumps
- Lighting equipment
- Traffic signs
- Radio relay stations
- Beacons
- Telemeter systems
- Telecommunication systems

FGS Elettronica - Energie Alternative - Via della Ferriera, 15
25079 Vobarno (BS) IT - Tel./Fax 0365 597196
info@fgsolar.it www.fgsolar.it